


Kelvin Led Base

Designed by Antonio Citterio/assistant Toan Nguyen, 2009

8W - 523lm - 3000K - CRI> 90

Table lamp emitting direct light. Fused aluminium alloy body with die-cast aluminium outer head and injection-moulded methacrylate diffuser. Double pantograph arm and adjustable head. Extruded aluminium alloy square tube structure (12×12 mm), CNC machined to house a stainless-steel load-compensation spring and injection-moulded acetal resin sliding blocks. 3 mm steel wire outer tie rods. ABS base cover. Electronic ON/OFF switch with optical sensor to dim the light located on the head. Optional Green Mode enables automatic brightness adjustment for energy efficiency. Available with multiple mounting options.

The original lamp in the popular Kelvin LED family, which revolutionises the design of angle-poise lighting. Inspired by a love of industrial design, creators Antonio Citterio and Toan Nguyen developed Kelvin to blend seemingly simple structures with cutting-edge innovation. Its sleek silhouette houses advanced technology, including an energy-saving Green Mode. With its ultra-flexible movement and professional-grade illumination, Kelvin has become a staple in homes and offices worldwide. Winner of the Red Dot Award for Product Design in 2025.

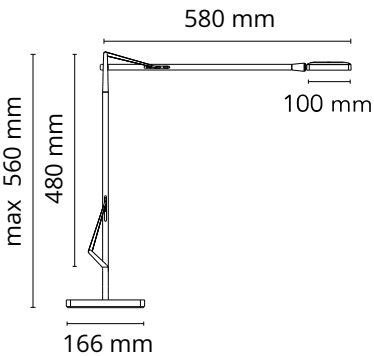

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Table
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	8
Lumen Output (lm)	523

Physical

Colour	White
Length (mm)	581
Cord colour	Clear
Cord length (mm)	1800
Net weight (kg)	4
Package volume (m3)	0.02
IP internal	20

Download

- Mounting instructions  PDF
- Mounting instructions  PDF
- Mounting instructions  PDF

Photometric Files


- LDT / IES  LDT

Technical Drawings

- 2D  ZIP
- 3D  ZIP



Schematic light drawing



Photometric


Lighting type	Direct
Light distribution	Symmetric
CCT (K)	3000
CRI>	90
Extreme cut off	No

Electrical


Insulation class	III
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Power supply	Remote included
Dimmable	Yes
Power supply type	Electronic 24V
Dimming interface	Dimmer Integrated
Plug type	Type A, Type C, Type G
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F

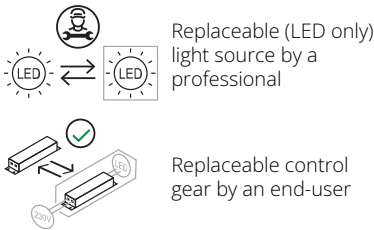

Spare Parts

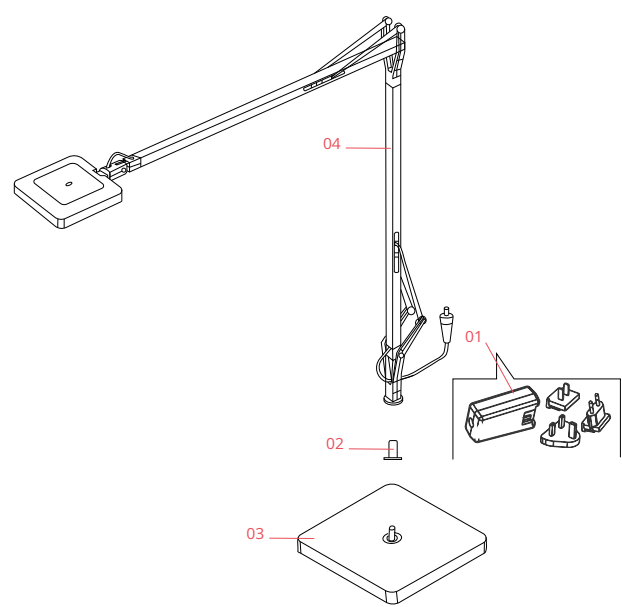

- | | | |
|-----|--------------------------------------|-----------|
| 01. | White plug assembly kit & 24V driver | RF6600209 |
| 02. | Kelvin Led Grey insert for lamp base | RF18763 |
| 03. | Kelvin Led gm white base | F3322009A |
| 04. | Kelvin led gm white body | F3312009 |



RF6600209
White plug assembly kit & 24V driver



RF18763
Kelvin Led Grey insert for lamp base



F3322009A
Kelvin Led gm white base



F3312009
Kelvin led gm white body