

Bon Jour
Designed by Philippe Starck, 2015




13W - 811lm - 2700K - CRI> 90

Table lamp emitting diffused light. Features transparent injection-moulded PMMA base and diffuser with Edge Lighting technology light source. Power cable equipped with dimmer switch for on/off control and 10-100% light adjustment. Plug-in power supply with interchangeable plugs included.

Designed by Philippe Starck, Bon Jour reflects his belief that light should be democratic, adaptable and personal. At its core is the idea of endless possibilities: a single archetype transformed by interchangeable crowns that invite individual expression. Combining timeless elegance with cutting-edge technology, Bon Jour balances performance with poetry, embodying Starck's instinct to merge innovation with a sense of freedom and play.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

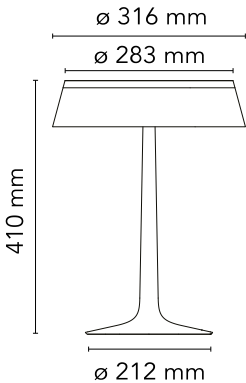

Main specifications

EAN	8059607001172
Mounting	Table
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	13
Lumen Output (lm)	811

Physical

Colour	Chrome
Length (mm)	283
Cord colour	Grey
Cord length (mm)	2350
Net weight (kg)	1.65
Package volume (m3)	0.07
IP internal	20

Download

- Mounting instructions  PDF
- Mounting instructions  PDF

Photometric Files


- LDT / IES  ZIP

Technical Drawings

- 2D  ZIP
- 3D  ZIP



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Roto symmetric
CCT (K)	2700
CRI>	90
Extreme cut off	No

Electrical

Insulation class	III
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Power supply	Remote included
Dimmable	Yes
Power supply type	Electronic 24V
Dimming interface	Dimmer Integrated
Plug type	Type A, Type C, Type G
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E



Accessories & Power Supply



OPTIONAL

F1033000

Bon Jour Crown



OPTIONAL

F1033007

Bon Jour Crown



OPTIONAL

F1033030

Bon Jour Crown




OPTIONAL

F1033088

Bon Jour Crown

Spare Parts

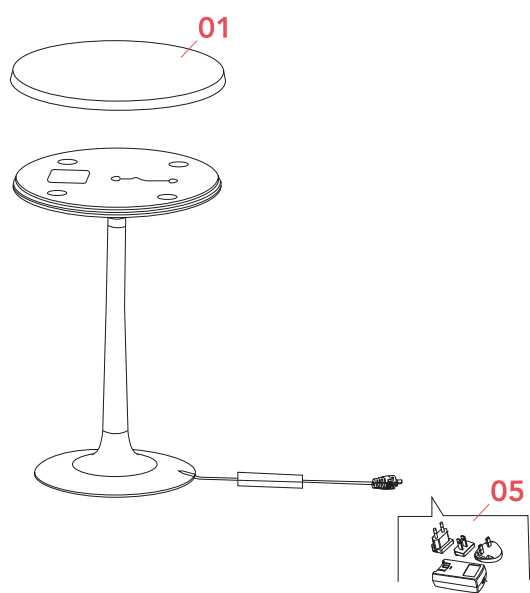

- | | | |
|-----|--------------------------------------|-----------|
| 01. | Top cover chrome assembly | F1031057 |
| 05. | White plug assembly kit & 24V driver | RF6600209 |



F1031057

Top cover chrome assembly



RF6600209

White plug assembly kit & 24V
driver